


Technical Data Sheet



Copper Vented Indirect

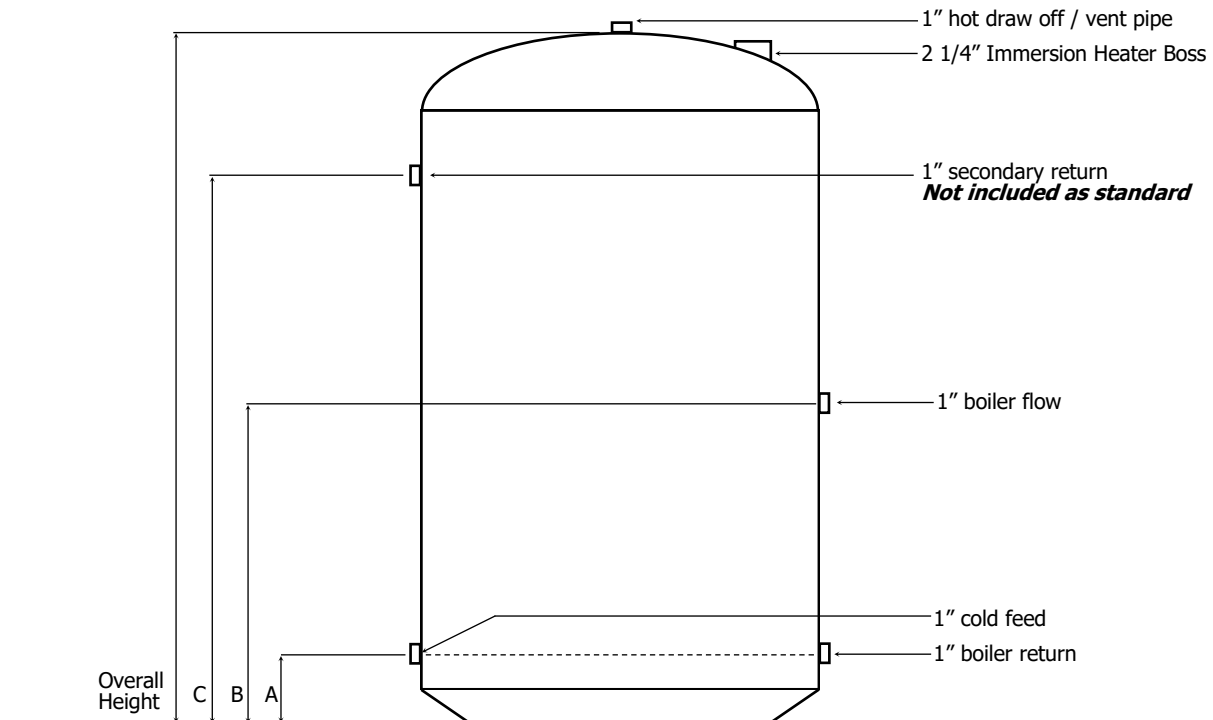

All dimensions are based on the cylinder shell only, insulation is not included

Available Grades	Max Working Head
Grade 3	10m
Grade 2	15m
Grade 1	25m


Capacity (L)	96	72	96	114	84	95	106	117	140	162	206
Height (mm)	1600	900	900	1050	675	750	825	900	1050	1200	1500
Diameter (mm)	300	350	400	400	450	450	450	450	450	450	450
A (mm)	100	100	100	100	100	100	100	100	100	100	100
B (mm)	540	400	400	470	300	340	370	400	470	540	620
C (mm)	1250	700	700	800	450	550	625	700	800	950	1200

Common Tapping Codes

IDH2

Standard Configuration.


- 1 x Hot Draw Off / Vent
- 1 x Cold
- 1 x Coil Flow
- 1 x Coil Return
- 1 x Top entry immersion boss



IDF2

Standard Configuration.


- 1 x Hot Draw Off / Vent
- 1 x Cold
- 1 x Coil Flow
- 1 x Coil Return
- 1 x Top entry immersion boss
- 1 x Secondary Return



IDH3

Standard Configuration.

- 1 x Hot Draw Off / Vent
- 1 x Cold
- 1 x Coil Flow
- 1 x Coil Return
- 1 x Side entry immersion boss



T: 01952 257961
F: 01952 253452

E: sales@telford-group.com
W: www.telford-group.com