


# Technical Data Sheet

## Slimline Heat-Pump

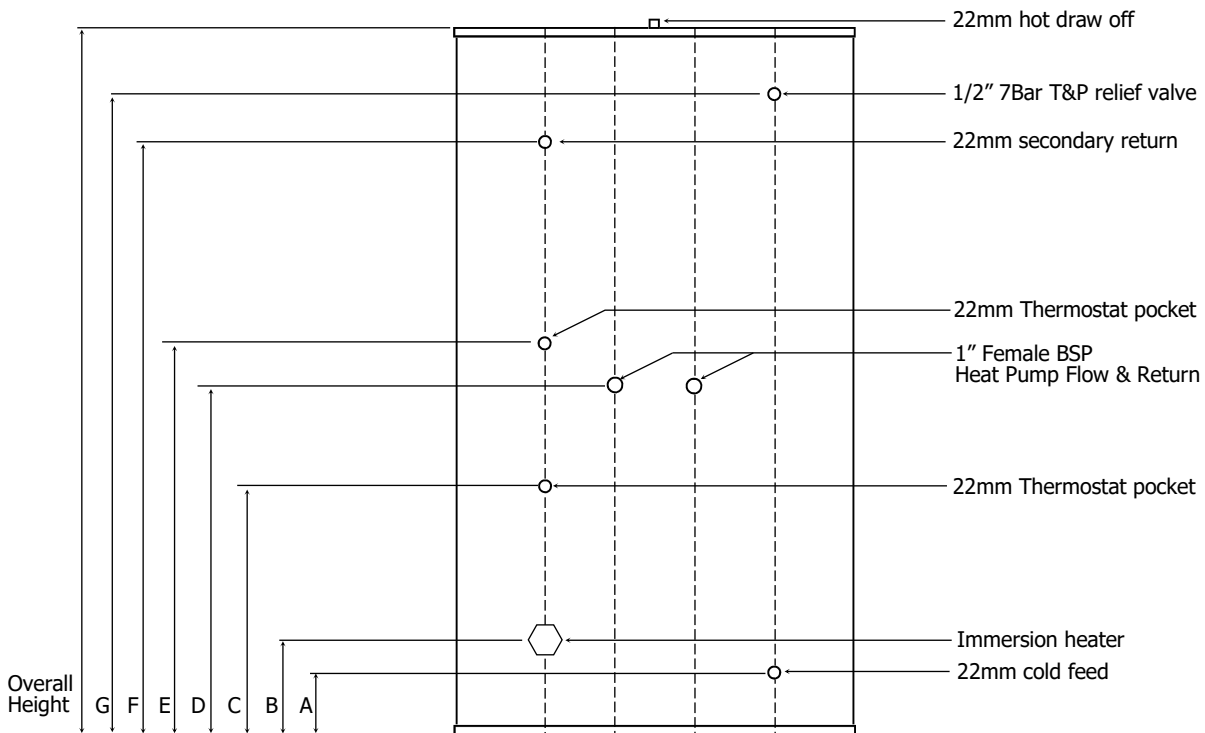

All unvented cylinders come with an unvented component kit to suit Dimensions are subject to change without any prior notice

Product Code	TSMI150SL/HP	TSMI170SL/HP	TSMI200SL/HP
Capacity (L)	150	170	200
Height (mm)	1200	1500	1800
Diameter Ø (mm)	470	470	470
A (mm)	143	143	143
B (mm)	173	173	173
C (mm)	523	523	798
D (mm)	778	778	1053
E (mm)	878	928	1203
F (mm)	878	1173	1474
G (mm)	1009	1305	1592
Coil Surface Area (m <sup>2</sup> )	2m <sup>2</sup>	2m <sup>2</sup>	3m <sup>2</sup>
ERP Band	C	C	C
Immersion Rating (kw)	3	3	3
Standard Heat Loss (Kwh/24hrs)	1.72	1.92	2.04
Empty Weight (kg)	38	42	46
Full Weight (kg)	187	210	240
Operating pressure (bar)	3	3	3
Max incoming supply pressure (Bar)	12	12	12



T: 01952 257961  
F: 01952 253452

E: sales@telford-group.com  
W: www.telford-group.com