

TEMPEST INDIRECT PLUS



ErP A Rated Indirect unvented stainless-steel hot water storage cylinder with external expansion vessel design.

Tempest Indirect hot water storage cylinders feature an internal coil and are designed for use with a gas or oil-fired boiler, as the main heat source (either sealed system or open vented). Manufactured from Duplex stainless-steel, the cylinders are supplied with a factory-fitted 3 kW immersion heater to provide back-up heat.

FEATURES & BENEFITS

- ✓ Duplex stainless steel provides superior corrosion resistance
- ✓ 316L grade stainless-steel 22mm compression fittings and coils
- ✓ Supplies mains pressure hot water and high flow rates
- ✓ Fast reheat
- ✓ Factory-fitted temperature and pressure relief value set at 7 bar / 90°C
- ✓ Remote expansion vessel with factory-fitted wall mounting bracket
- ✓ Full unvented kit supplied
- ✓ Highly efficient
- ✓ Fully insulated to minimise any heat loss
- ✓ ErP rated A - capacities from 90-200 litres (250-300 litres ErP rated B)
- ✓ Factory-fitted 3kW immersion heater
- ✓ Available in 90-300 litre capacities
- ✓ Lifetime manufacturing warranty on inner container (2 years on components)
- ✓ Renewable and bespoke options available



Supplied with:

- ✓ Acetal tundish
- ✓ Inlet control group
- ✓ Two port valve
- ✓ External expansion vessel with bracket
- ✓ Dual probe thermostat
- ✓ Temperature & pressure relief valve*
- ✓ 3kW immersion heater*

*Factory-fitted




THE HOT WATER STORAGE SPECIALISTS

— EST. 1989 —

TEMPEST INDIRECT PLUS

TECHNICAL DATA

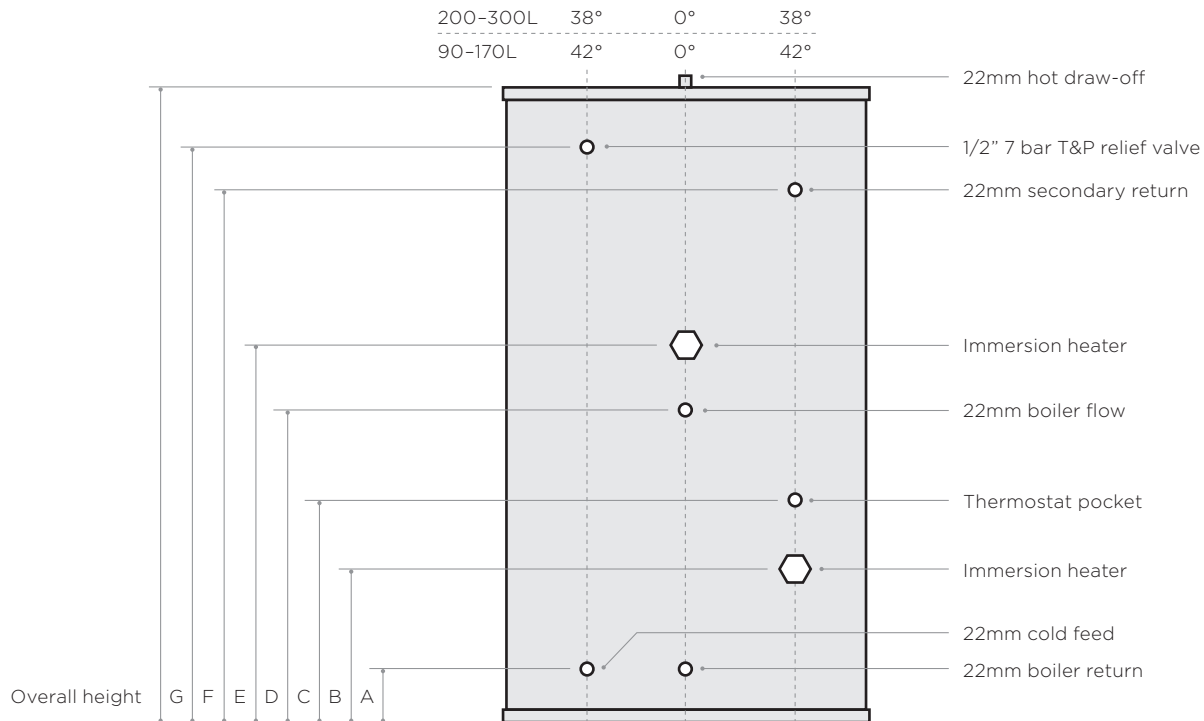

Capacity (L)	90	125	150	170	200	250	300
Height (mm)	1050	1200	1350	1650	1950	1950	2150
Diameter (mm)	580	580	580	580	580	660	660
A (mm)	170	170	170	170	195	195	195
B (mm)	200	200	200	200	225	225	225
C (mm)	400	400	400	450	475	555	555
D (mm)	495	495	495	600	625	825	845
E (mm)	645	645	645	750	775	975	995
F (mm)	-	-	-	-	1645	1535	1735
G (mm)	870	1020	1170	1480	1760	1735	1935

Capacity (L)	90	125	150	170	200	250	300
Reheat from cold (minutes)	26	36	37	36	33	35	40
Reheat from 75% draw-off (minutes)	18	25	26	25	24	25	29
ERP Rating*	A	A	A	A	A	B	B
Immersion Rating (kW)	3	3	3	3	3	3	3
Standing Heat Loss (kWh/24hrs)	0.77	0.86	0.91	0.96	1.01	1.34	1.68

*Based on thermostat set a 60°C

Telford Copper & Stainless Steel Cylinders Ltd

Unit 22, Furrows Business Park, Haybridge, Telford TF1 2FE
T +44 (0)1952 257 961 | E sales@telford-group.com

www.telford-group.com