

TEMPEST INDIRECT SLIMLINE



Indirect slimline unvented stainless-steel hot water storage cylinder with external expansion vessel design.

Tempest Indirect Slimline hot water storage cylinders feature an internal coil and are designed for use with a gas or oil-fired boiler as the main heat source (either sealed system or open vented). Ideal for installations where space is an issue, the cylinders are manufactured from Duplex stainless-steel and are supplied with a factory-fitted 3 kW immersion heater to provide back-up heat.

FEATURES & BENEFITS

- ✓ Duplex stainless-steel provides superior corrosion resistance
- ✓ 316L grade stainless-steel 22mm compression fittings and coils
- ✓ Supplies mains pressure hot water and high flow rates
- ✓ Fast reheat
- ✓ Factory-fitted temperature and pressure relief value set at 7 bar / 90°C
- ✓ Remote expansion vessel with factory-fitted wall mounting bracket
- ✓ Full unvented kit supplied
- ✓ Highly efficient
- ✓ Fully insulated to minimise any heat loss
- ✓ Factory-fitted 3kW immersion heater
- ✓ Available in 90-250 litre capacities
- ✓ Lifetime manufacturing warranty on inner container (2 years on components)*
- ✓ Renewable and bespoke options available

*Terms & Conditions apply



Supplied with:

- ✓ Acetal tundish
- ✓ Inlet control group
- ✓ Two port valve
- ✓ External expansion vessel with bracket
- ✓ Dual probe thermostat
- ✓ Temperature & pressure relief valve*
- ✓ 3kW immersion heater(s)*

*Factory-fitted




THE HOT WATER STORAGE SPECIALISTS

EST. 1989

TEMPEST INDIRECT SLIMLINE

TECHNICAL DATA

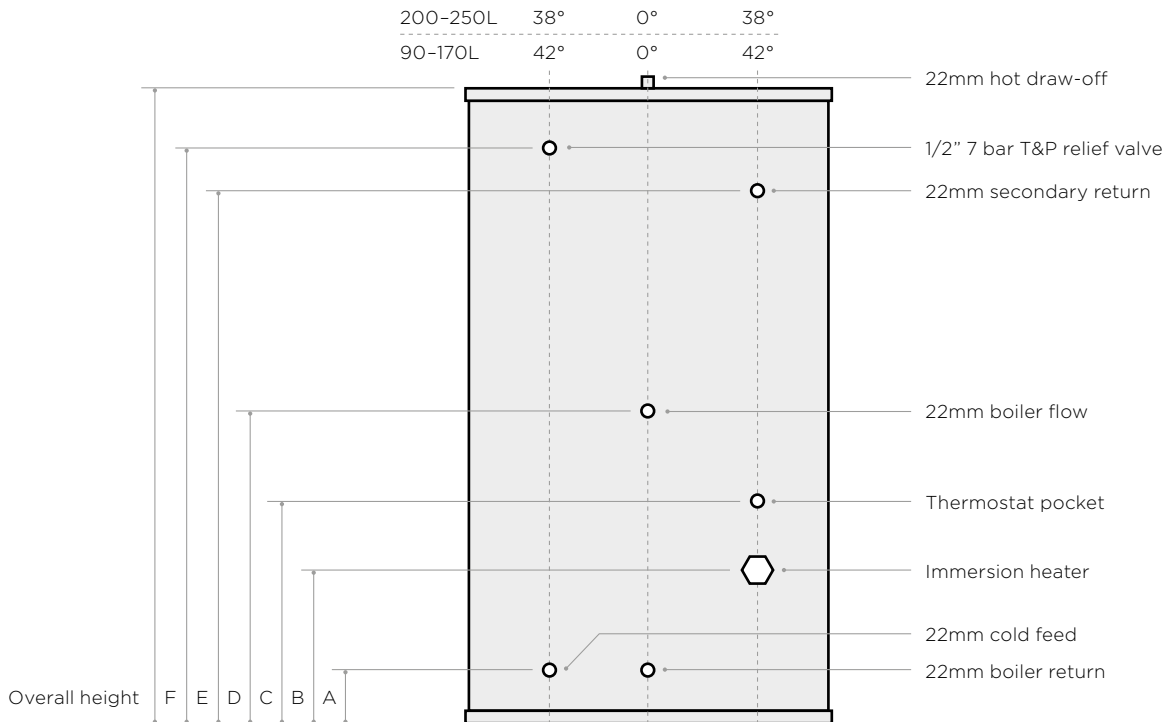

Capacity (L)	90	125	150	170	200	250
Height (mm)	900	1050	1200	1500	1800	1800
Diameter (mm)	470	470	470	470	470	510
A (mm)	170	170	170	170	195	195
B (mm)	200	200	200	200	225	225
C (mm)	400	400	400	450	475	555
D (mm)	495	495	495	600	625	825
E (mm)	-	-	-	-	1045	1465
F (mm)	710	860	1010	1305	1605	1615

Capacity (L)	90	125	150	170	200	250
Reheat from cold (minutes)	26	36	37	36	33	35
Reheat from 75% draw-off (minutes)	18	25	26	25	24	25
ERP Rating*	C	C	C	C	C	C
Immersion Rating (kW)	3	3	3	3	3	3
Standing Heat Loss (kWh/24hrs)	1.37	1.48	1.72	1.92	2.04	2.16

*Based on thermostat set a 60°C

Telford Copper & Stainless Steel Cylinders Ltd

Unit 22, Furrows Business Park, Haybridge, Telford TF1 2FE
T +44 (0)1952 257 961 | E sales@telford-group.com

www.telford-group.com