


HS7

Technical Data Sheet

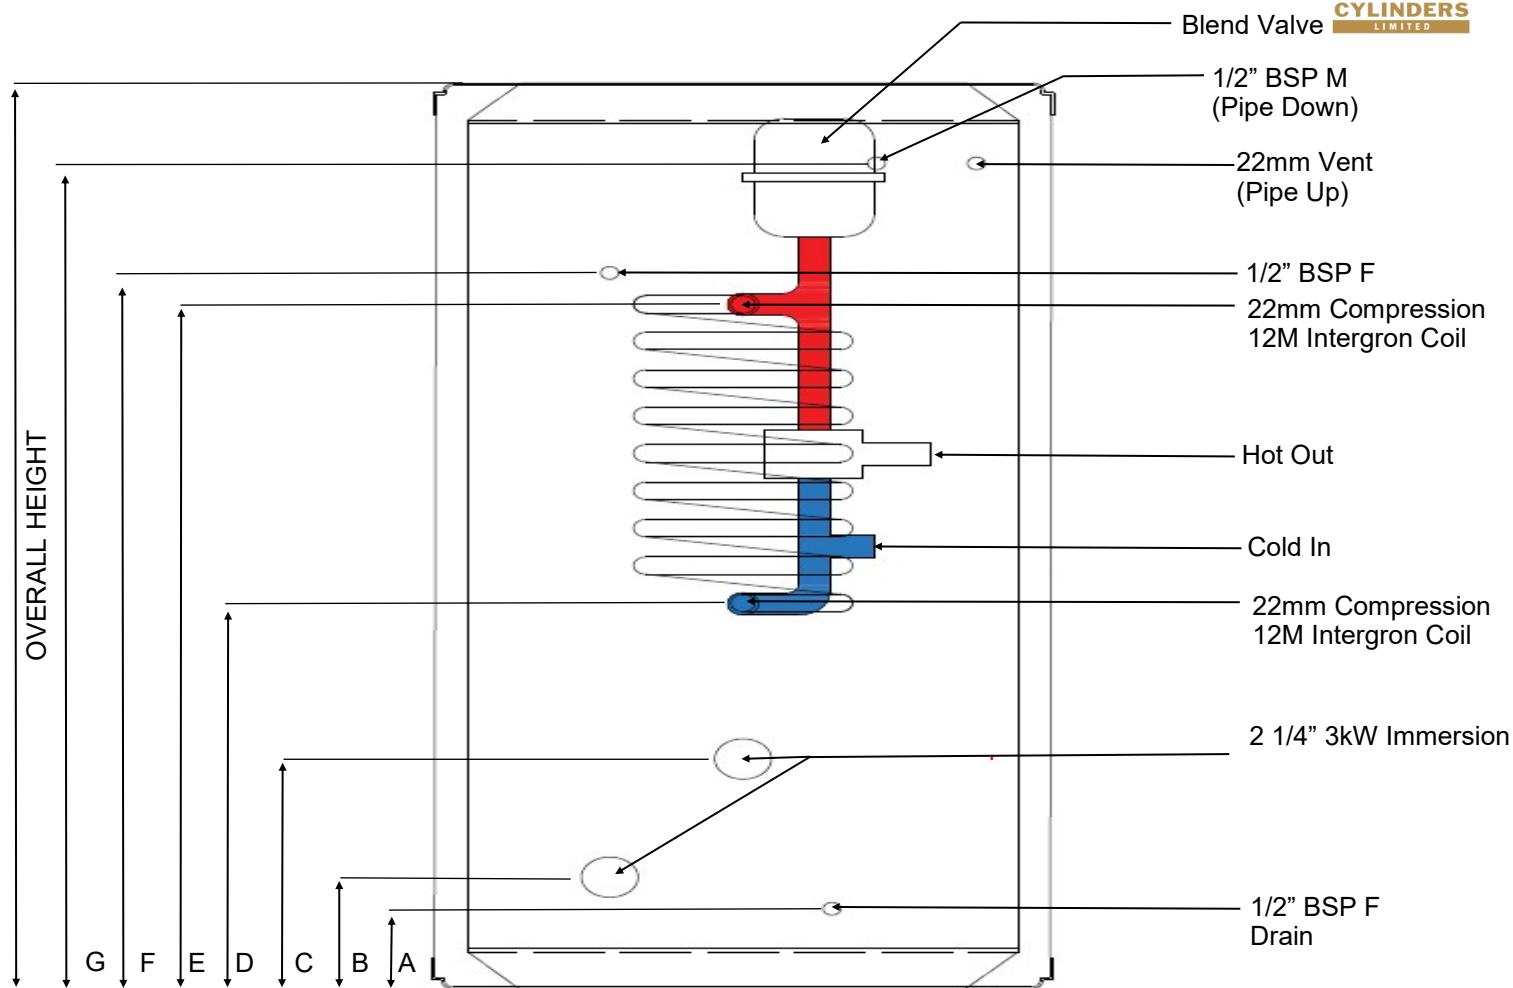

3Bar Pressure Reducing Valve must be fitted

Product Code	Hydrapak/HS7/150	Hydrapak/HS7/170
Nominal Capacity (L)	150	170
Height (mm)	995	1150
Diameter Ø (mm)	554	554
A (mm)	100	100
B (mm)	140	140
C (mm)	290	290
D (mm)	390	390
E (mm)	760	830
F (mm)	800	870
G (mm)	850	1025
Reheat Time (10°C to 73°C)	1-IMM/220min 2-IMM/110min	1-IMM/250min 2-IMM/125min
Standing Heat Loss (kWh/24h)	1.9	1.95
Actual capacity (L)	145	165
Energy efficiency class of model	C	C
Operating Coil Pressure (bar)	3	3
Max Shell Working Pressure (bar)	1	1
Immersion Heater (Qty x Kw rating)	2 x 3	2 x 3