


Technical Data Sheet



Pre-plumbed Hi-Flow Unvented Heat Pump Tank on Tank Cylinder

Please allow 170mm for pipework on front of cylinder

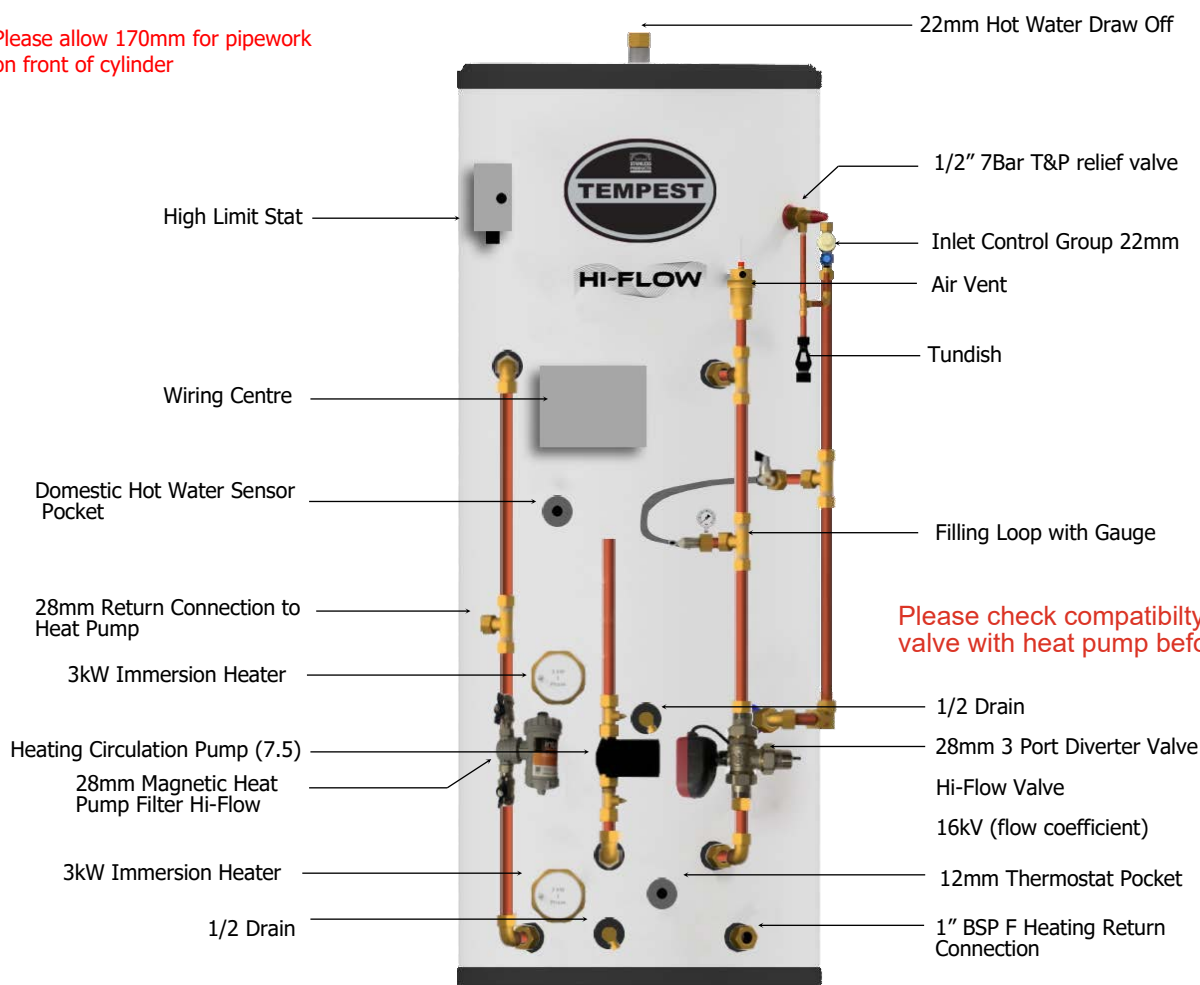

Product Code	TSM1150/50/HP/PP/HF	TSM1170/50/HP/PP/HF	TSM1200/50/HP/PP/HF	TSM1250/50/HP/PP/HF	TSM1300/50/HP/PP/HF
Nominal Capacity (L)	150	170	200	250	300
Height (mm)	1460	1315	1430	1780	2020
Diameter Ø (mm)	554	580	580	580	580
Internal Buffer Store Volume (L)	50	50	50	50	50
Standing Heat Loss (kWh/24hrs)	1.85	1.94	1.85	2.00	2.22
Standing Loss (W)	77	81	77	83	92
ERP Rating	C	C	C	C	C
Coil Surface Area (m ²)	2m ²	2m ²	3m ²	3m ²	3m ²
Empty Weight (kg)	70	79	88	98	110
Full Weight (kg)	219	247	282	344	404
Max Supply Pressure (Bar)	12	12	12	12	12
Max Operating Pressure (Bar)	3	3	3	3	3
Immersion Heater Rating	3kW @ 240V	3kW @ 240V	3kW @ 240V	3kW @ 240V	3kW @ 240V



T: 01952 257961
F: 01952 253452

W: www.telford-group.com
E: sales@telford-group.com