


Technical Data Sheet



Cylinder dimensions are subject to change without prior warning.

Open-Vented Combination Thermal Store Solar Coil

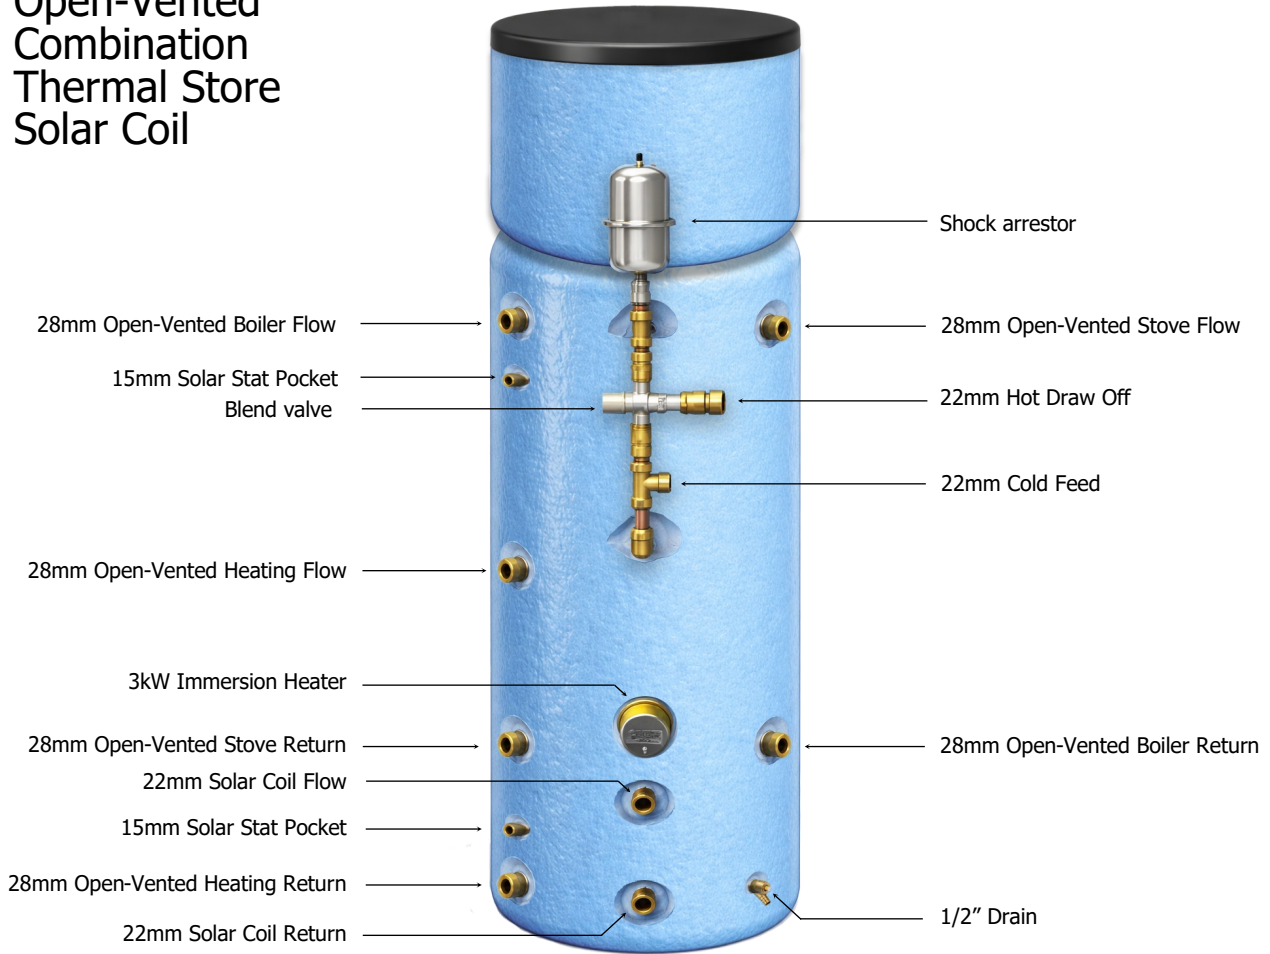

It is recommended to fit a 3 bar pressure reducing valve to incoming supply

Product Code	TSC144/2012	TSC160/2013	TSC200/2014	TSC250/2015	TSC300/2016
Nominal Capacity (L)	144	160	200	250	300
Hot Water Capacity (L)	124	140	180	230	280
Height (mm)	1400	1550	1850	1800	2000
Diameter (mm)	450	450	450	500	500
Diameter with insulation (mm)	550	550	550	600	600
Empty Weight (kg)	64	67	71	71	75
Full Weight (kg)	228	248	291	341	395
Expansion Vessel Volume (L)	1	1	1	1	1
Domestic Coil Pressure (bar)	3	3	3	3	3
Primary Coil Pressure (bar)	9	9	9	9	9
Blended Hot Water Temp (C)	47	47	47	47	47
Immersion Heater Rating	3kW @ 240V	3kW @ 240V	3kW @ 240V	3kW @ 240V	3kW @ 240V



White cased models available, add C to the end of your code - example TSC144/2012C

T: 01952 257961
F: 01952 253452

E: sales@telford-group.com
W: www.telford-group.com

PT240226-2