


Technical Data Sheet Manual Fill



3Bar Pressure Reducing Valve must be fitted

Product Code	TSC150MF/OF2	TSC200MF/OF2	TSC280MF/OF2
Nominal Capacity (L)	150	200	280
Height (mm)	1400	1750	2000
Diameter (mm)	510	510	554
A (mm)	100	100	100
B (mm)	125	125	125
C (mm)	425	655	925
D (mm)	560	846	1125
E (mm)	940	1231	1505
F (mm)	1400	1750	2000
Standing Heat Loss (kWh/24h)	1.9	1.8	2.2
Reheat Time (10°C to 73°C)	1-IMM/220min 2-IMM/110min	1-IMM/296min 2-IMM/148min	1-IMM/410min 2-IMM/205min
Actual Capacity (L)	145	188	292
Energy efficiency class of model	C	C	C
Max Shell Working Pressure (bar)	1	1	1
Immersion Heater Rating	3kw 240v	3kw 240v	3kw 240v
Operating Coil Pressure (bar)	3	3	3

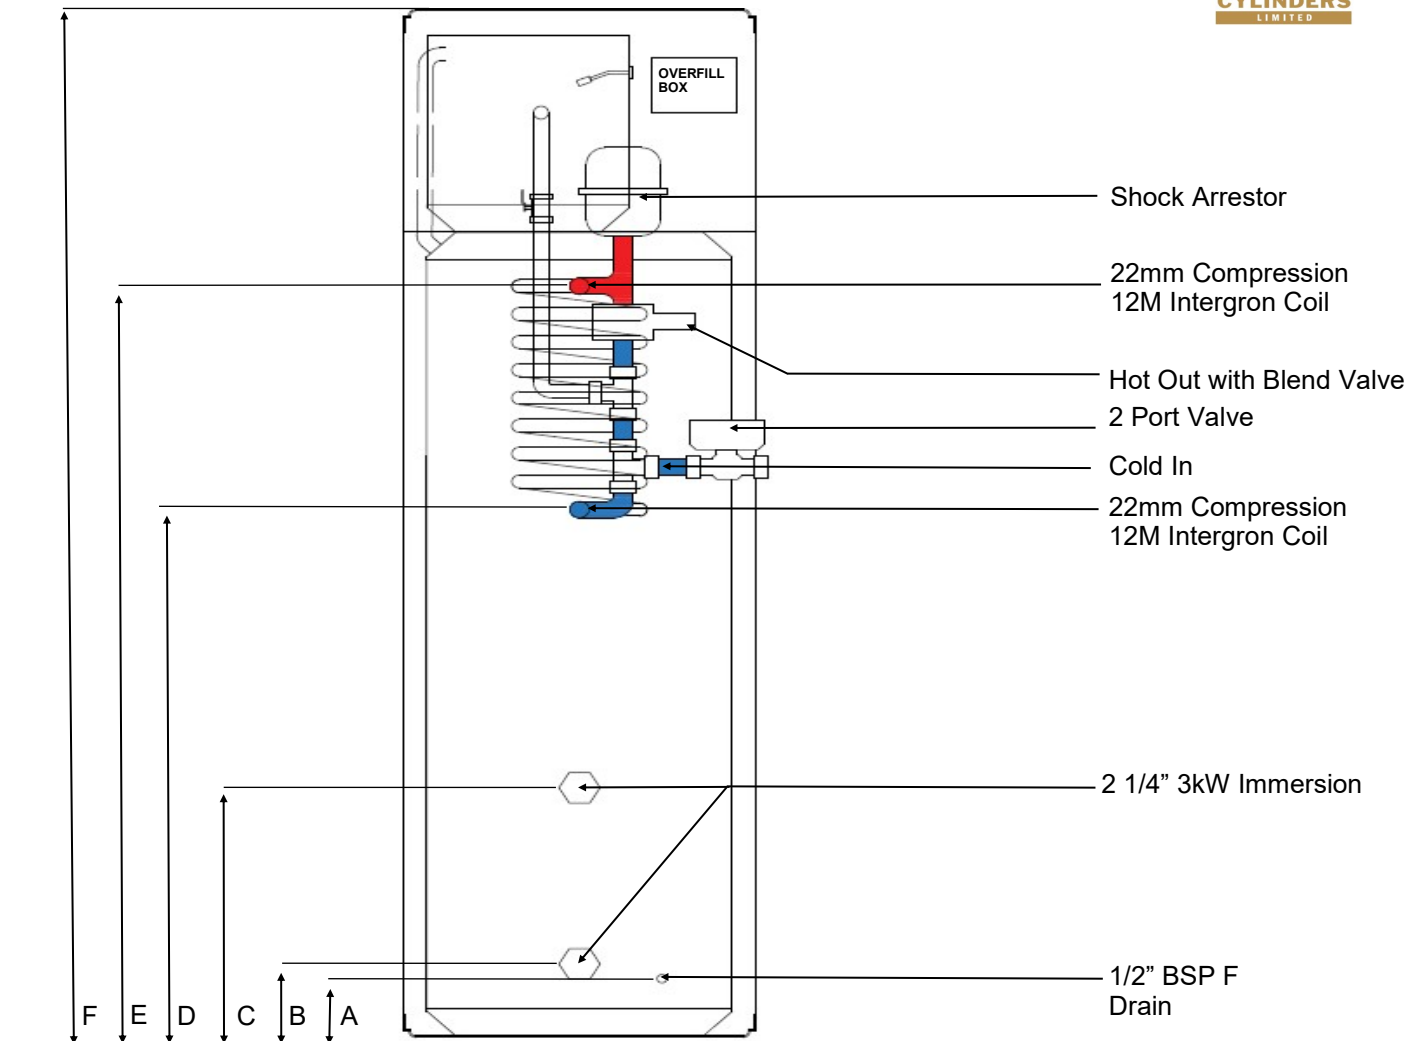

T: 01952 257961

E: sales@telford-group.com

F: 01952 253452

W: www.telford-group.com