


Technical Data Sheet



Cylinder dimensions are subject to change without prior warning.

Sealed System Thermal Store

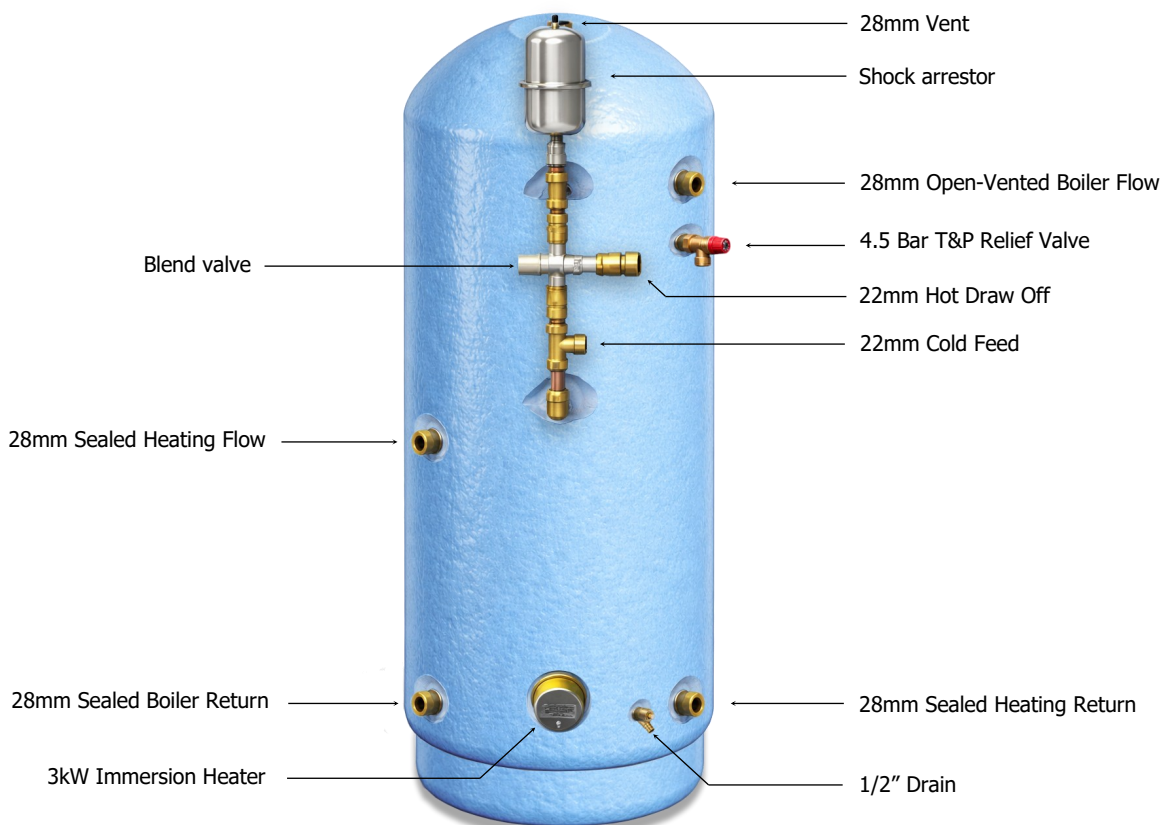

It is recommended to fit a 3 bar pressure reducing valve to incoming supply

Product Code	TSS115/1120	TSS144/1342	TSS160/1453	TSS200/1564	TSS250/1675	TSS300/1786
Nominal Capacity (L)	115	144	160	200	250	300
Hot Water Capacity (L)	95	124	140	180	230	280
Height (mm)	900	1050	1200	1500	1800	1800
Diameter (mm)	450	450	450	450	450	500
Diameter with insulation (mm)	550	550	550	550	550	600
Empty Weight (kg)	46	51	55	58	58	62
Full Weight (kg)	181	215	235	278	328	382
Expansion Vessel Volume (L)	1	1	1	1	1	1
Domestic Coil Pressure (bar)	3	3	3	3	3	3
Max Working Pressure (bar)	2.5	2.5	2.5	2.5	2.5	2.5
Blended Hot Water Temp (C)	47	47	47	47	47	47
Immersion Heater Rating	3kW @ 240V	3kW @ 240V	3kW @ 240V	3kW @ 240V	3kW @ 240V	3kW @ 240V



White cased models available, add C to the end of your code - example TSS115/1120C

T: 01952 257961

E: sales@telford-group.com

F: 01952 253452

W: www.telford-group.com

PT240226-2