


TRISTOR MANUAL FILL

TECHNICAL DATA

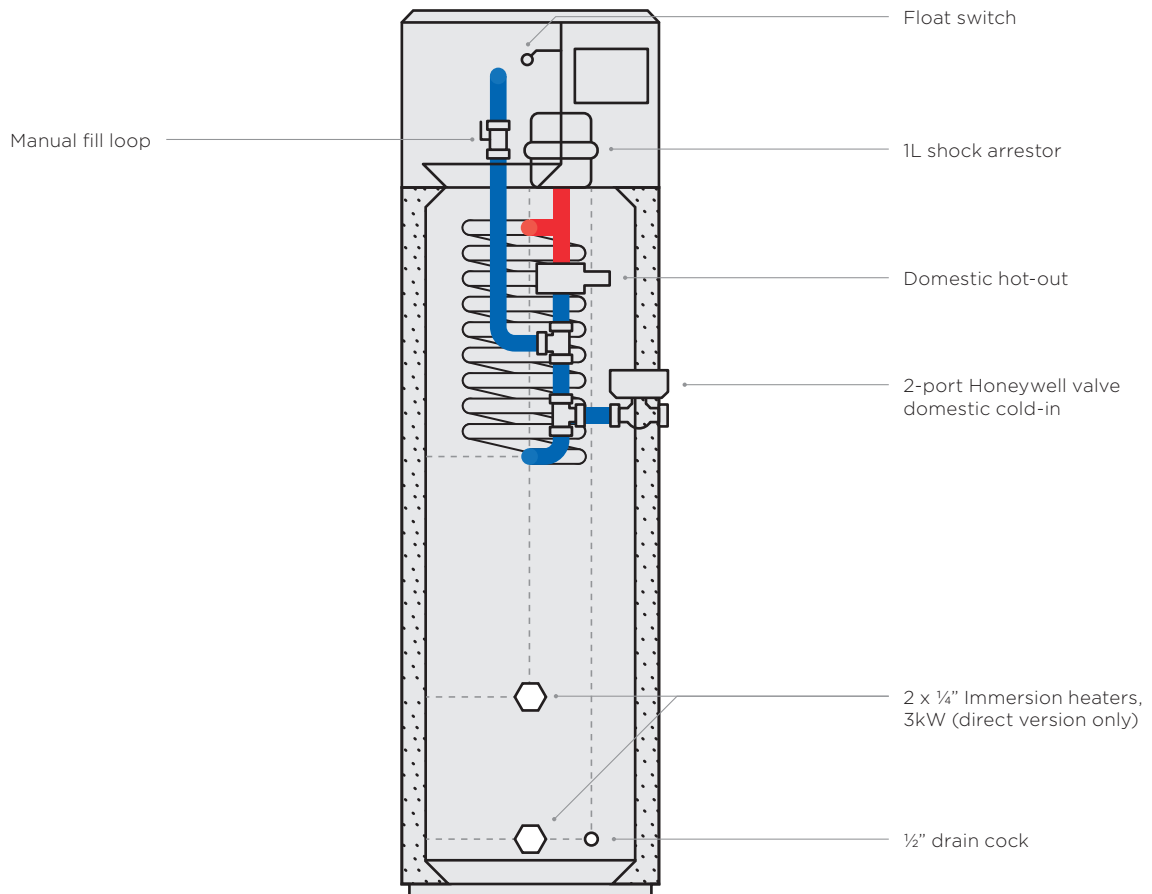

Capacity (L)	150	200	280
Height (mm)	1400	1750	2000
Diameter (mm)	510	510	555

Capacity (L)	150	200	280
Coil Surface Area (m ²)	2.5	2.5	2.5
Heat Input - coil	1.8m ² >20kW	1.8m ² >20kW	1.8m ² >20kW
Reheat from cold - Indirect with Boiler (minutes)	33	37	40
Reheat from cold - Direct with 2 x Immersion Heaters (minutes)	110	130	185
Reheat from cold - Direct with 1 x Immersion Heaters (minutes)	220	260	370
ERP Rating*	C	C	C
Immersion Rating (kW)	2 x 3	2 x 3	2 x 3
Standing Heat Loss - single coil (kWh/24hrs)	1.9	2.45	2.71

*Based on thermostat set a 60°C