

TORNADO DIRECT PLUS



ErP B Rated direct unvented stainless-steel hot water storage cylinder with built-in thermal expansion.

Tornado Direct Plus hot water storage cylinders are particularly suited to smaller properties where electricity is the only available heat source. Manufactured from Duplex stainless-steel, the cylinders are supplied with two, factory-fitted 3kW immersion heaters which provide the option of heating water on different schedules, tariffs and configurations.

FEATURES & BENEFITS

- ✓ Duplex stainless steel provides superior corrosion resistance
- ✓ 316L grade stainless-steel 22mm compression fittings and coils
- ✓ Supplies mains pressure hot water and high flow rates
- ✓ Fast reheat
- ✓ Factory-fitted temperature and pressure relief valve set at 7 bar / 90°C
- ✓ Built-in thermal expansion - no external expansion vessel required
- ✓ Full unvented kit supplied
- ✓ Highly efficient
- ✓ Fully insulated to minimise any heat loss
- ✓ ErP rated B
- ✓ 2 x factory-fitted 3kW immersion heaters
- ✓ Available in 125 & 150 litre capacities
- ✓ Lifetime manufacturing warranty on inner container (2 years on components)*
- ✓ Renewable and bespoke options available


*Terms & Conditions apply



THE HOT WATER STORAGE SPECIALISTS
— EST. 1989 —

TORNADO DIRECT PLUS

TECHNICAL DATA

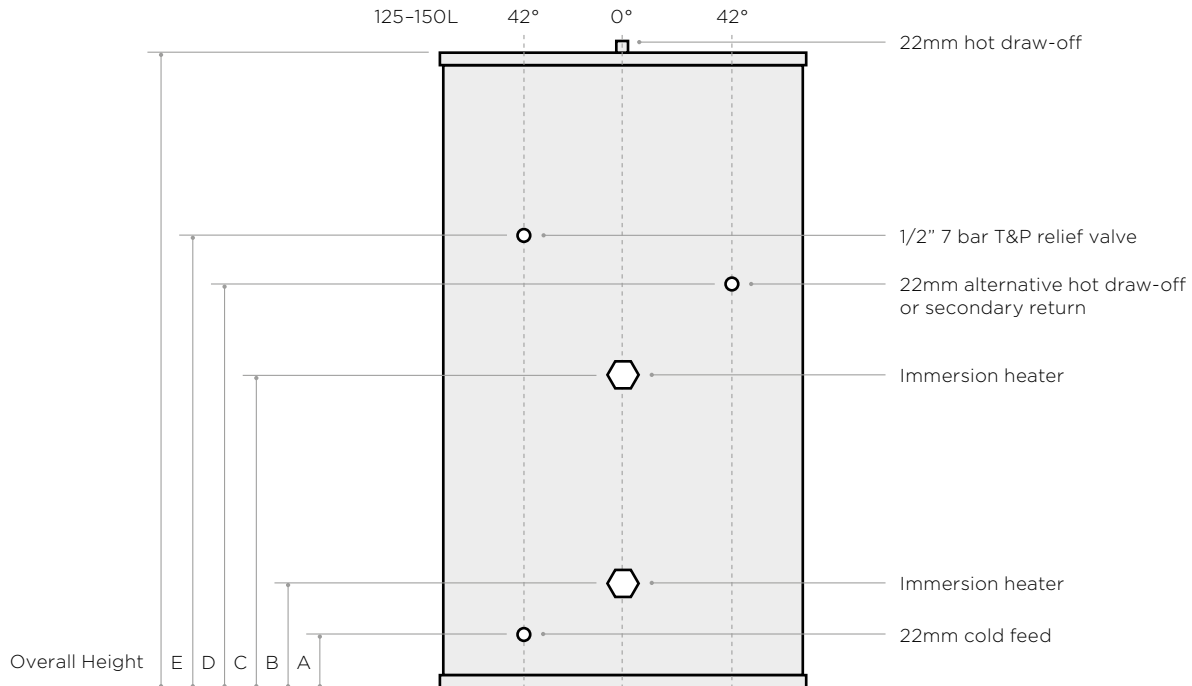

Capacity (L)	125	150
Height (mm)	1330	1550
Diameter (mm)	660	660
A (mm)	156	156
B (mm)	186	186
C (mm)	605	605
D (mm)	697	817
E (mm)	797	917

Capacity (L)	125	150
Reheat from cold (minutes)	72	86
Reheat from 75% draw-off (minutes)	37	45
ERP Rating*	B	B
Immersion Rating (kW)	2 x 3	2 x 3
Standing Heat Loss (kWh/24hrs)	1.01	1.06

*Based on thermostat set a 60°C

Telford Copper & Stainless Steel Cylinders Ltd

Unit 22, Furrows Business Park, Haybridge, Telford TF1 2FE
T +44 (0)1952 257 961 | E sales@telford-group.com

www.telford-group.com